

# HIGH TEMPERATURE SUPPLIES

## Mold Release, Binder, Anti-Seize, Thread Locker

### Rescor 112 Boron Nitride Spray On

#### Coating and Lubricant

Boron Nitride has excellent electrical insulation, high thermal conductivity and is a superior high temperature lubricant.


It is inert to most molten metals, glasses and salts.

This unique combination makes for an ideal high temperature lubricant, mold release and electrically resistant coating.

Use continuously to 1500°F in air and to 3600°F in inert atmospheres.

Now available in a convenient and fast drying (Non Ozone Depleting) spray formulation.

*Applications Include* mold release, lubricant, barrier layer and as an anti-splatter compound in the metals, glass, composites, plastics and ceramic industries.

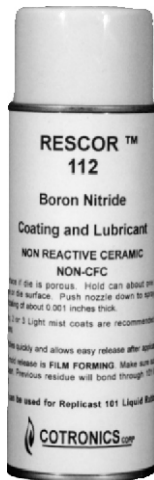

### Duralco 6105SP

#### 1200°F Stainless Spray Coating

Now the corrosion resistance of Stainless Steel in an easy to use, spray paint form.

Cotronics' unique room temp. curing, high temperature, resin system is combined with type 316L stainless steel flakes.

When sprayed, it forms a continuous layer of stainless steel to protect the underlying metallic surfaces. Cures at room temp. and protects up to 1200°F

Resistant to most chemicals and solvents. Ideal for coating high temp. equipment, pipes, stacks, boilers, furnaces.

Convenient 7 oz. spray cans. Coverage is approximately 30 sq. ft.



### R450 - 2400°F Anti-Seize

#### No Galling ! No Pitting ! No Seizing !



R-450 Anti-Seize prevents metal to metal contact and eliminates failures often caused by corrosion, abrasion, strong acids and alkalis.

Allows for easy movement and disassembly. Ideal thread lubricant for steel to stainless, brass to steel and dissimilar materials.

Use in power plants, chemical facilities, oil refineries, automotive, appliance, aerospace, etc.

### 1000°F Thermeez Gloves and Mittens



Thermeez is a strong woven material that out-performs asbestos for most applications.

Thermeez is 100% Asbestos Free and has superior heat resistance, improved abrasion resistance and is More Durable than asbestos. Thermeez can be used to 1000°F.

### Duralco T507 - 500°F Slippery Teflon™

#### Paint on Dry At Room Temp.

Duralco T507 Teflon paint cures to provide a non-stick surface layer of Teflon.

Designed primarily to provide a non stick surface with exceptional durability due to its composite structure.

Just mix the resin with its hardener and apply.

Duralco T507 cures at room temp. and use up to 500 °F

Duralco T507 will provide excellent resistance to high humidity and saline atmospheres, fuel gas exhaust, corrosive environments, organic solvents and offer galvanic protection.

Use on powder chutes, assembly lines, heat release films, reusable mold release, repairs to factory equipment, etc.

Ideal for processing equipment, OEM applications, etc.



Cat. No.	Description
Rescor 112-1 . . . . .	13 oz Spray Can
Rescor 112-1C . . . . .	12 - 13 oz cans.
Duralco 6105SP-1 . . . . .	7 oz. Spray Can
Case Pack . . . . .	12 - 7 oz. cans

R-450-1 . . . . .	4 oz Brush Top Can.
T507-1 . . . . .	Pint Kit
T507-2 . . . . .	Qt. Kit

#### General Purpose Glove

395G-1A . . . . .	14" Gloves
395G-2B . . . . .	23" Arm Length Gloves

*Aluminized Back Glove* (Use for Radiant Heat and Splash)

395G-1E . . . . .	14"
395G-2F . . . . .	23"

*Mittens are Available on request.*



**COTRONICS** CORPORATION

www.cotronics.com

(718) 646-7996 Fax (718) 646-3028 3379 Shore Parkway, Brooklyn, N.Y. 11235